


3-way reversing valve, L-drilled, G-threaded, female

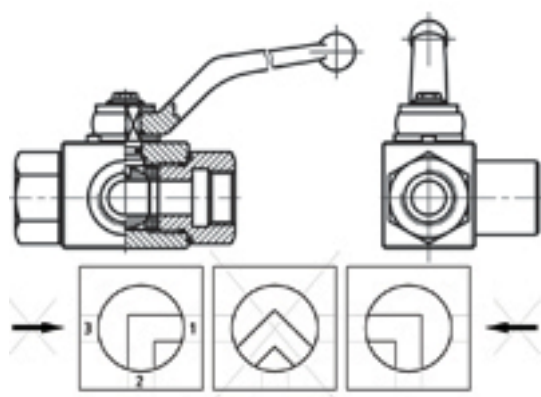

Matériau d'étanchéité
Boîtier en fonte

POM/NBR
Non

Article no	DN	Pression de travail (MPa)	Filetage
86410404	6	40	G 1/4" femelle
86410606	10	40	G 3/8" femelle
86410808	12	40	G 1/2" femelle
86411212	20	35	G 3/4" femelle
86411616	25	35	G 1" femelle