


3-way reversing valve, T-drilled, G-threaded, female

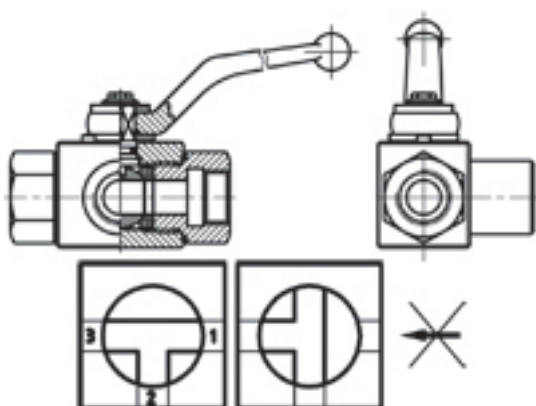

Matériau d'étanchéité
Boîtier en fonte

POM/NBR
Non

Article no	DN	Pression de travail (MPa)	Filetage
86420606	10	40	G 3/8" femelle
86420808	12	40	G 1/2" femelle